



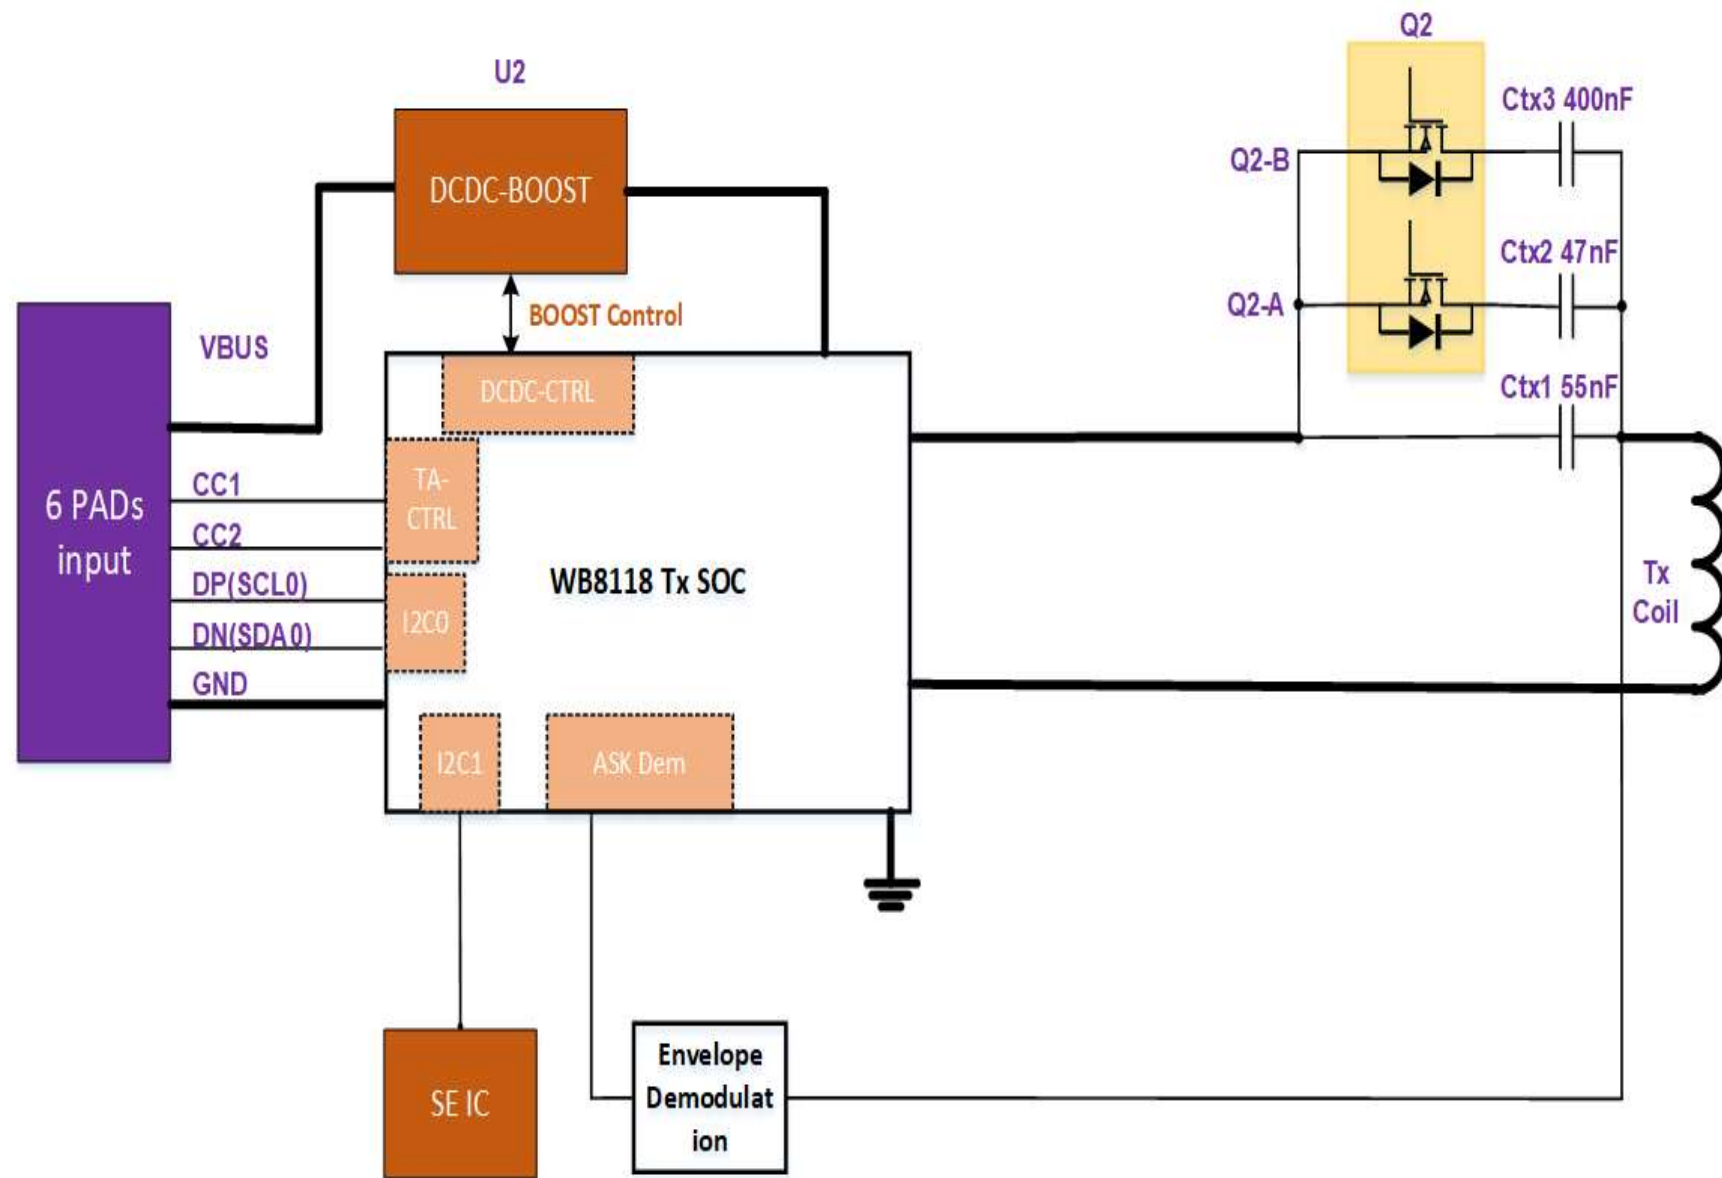


Title		
WB8118_MPP_TX		
Size A	Document Number System diagram	Rev v0.5
Date:	Wednesday, June 19, 2024	Sheet 1 of 3


Input USB

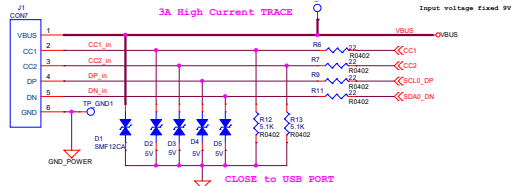

To avoid inrush current damage circuit due to DC input, a soft start circuit is required if user will plug in and out during operation.




Power Boost

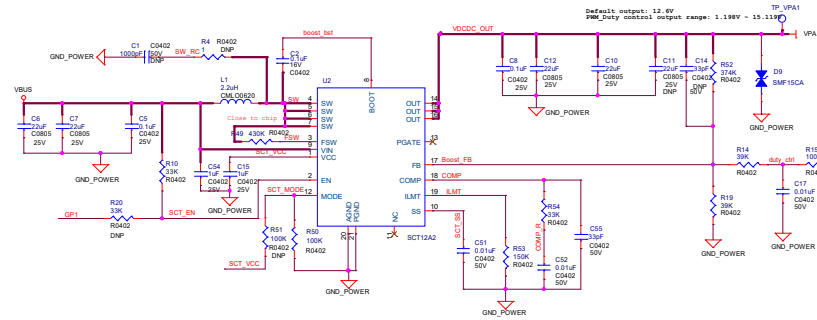

BS10M 150K ----> 150K 10A Peak
BS10M 450K ----> 450K 10A Peak
MODE: High ----> PWM Mode


SE IC

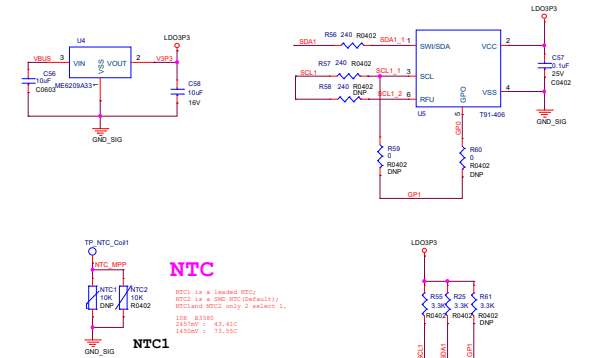


NTC

NTC1

WB118_Power

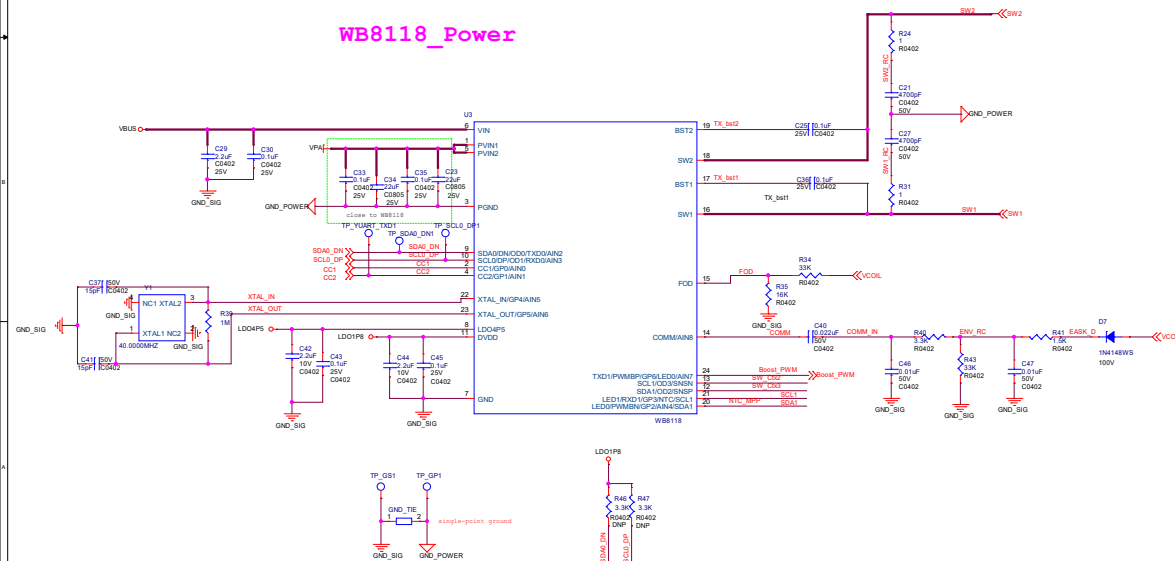

Caps select

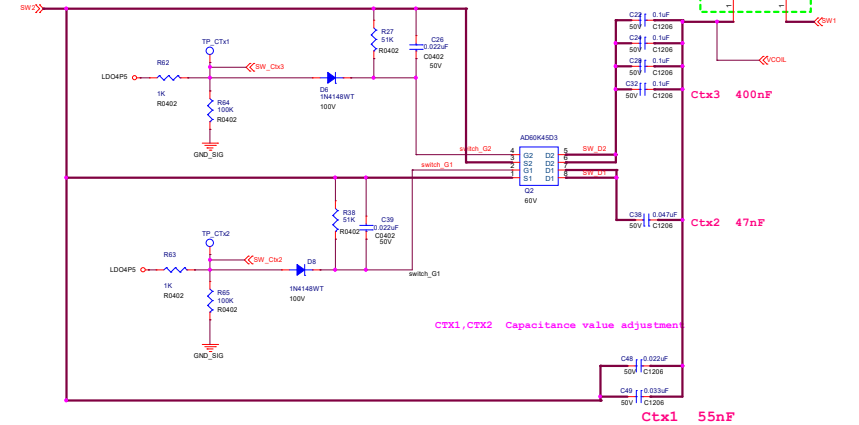

File	WB118_APP_TX	Rev
Doc	DocWB118_Main	V0.5
Date	Saturday, June 25, 2021	Sheet 2 of 3

The figure is a large, empty rectangular area, likely intended for a drawing or diagram. It is bounded by a thin black line. In the bottom right corner, there is a title block with the following information:

Title		
WB8118_MPP_TX		
Size	Document Number	Rev
A	Change list	V0.5
Date: Wednesday, June 19, 2024		Sheet 3 of 3